


Manual handel  
Stepper motor

$\phi 20$

Connector

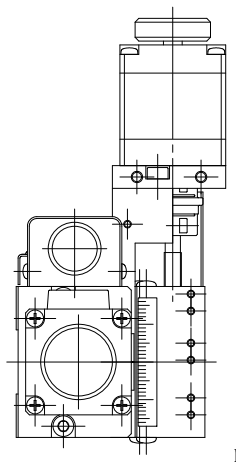

Connector

4-M3 depth 8

$\phi 20$

Manual handle

Stepper motor

111

32

40


32

40

8.5

111


18.5

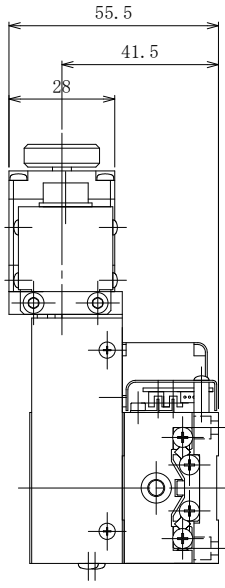

55.5

41.5

28

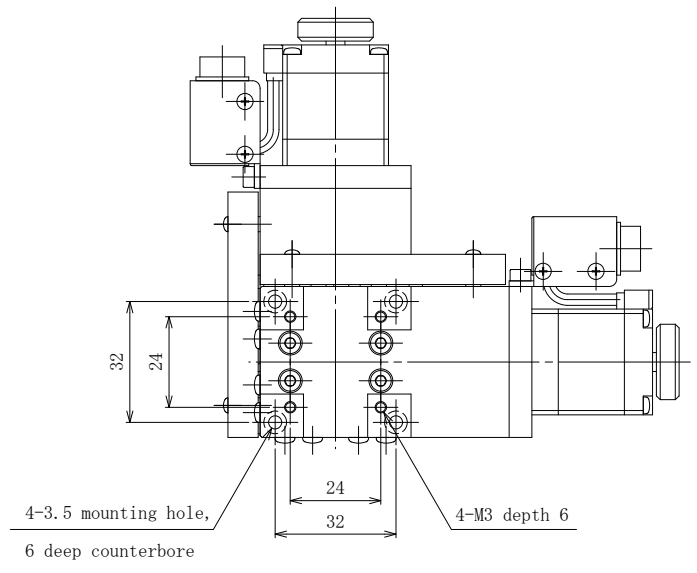

32


24

24

32

4-3.5 mounting hole,  
6 deep counterbore

4-M3 depth 6

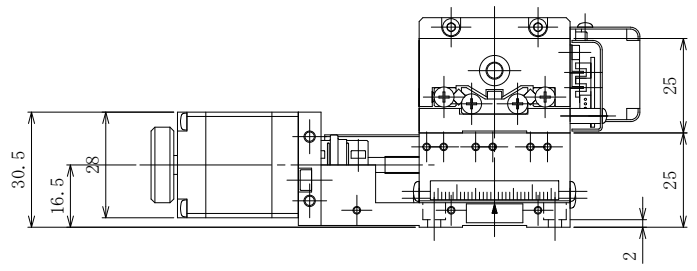

30.5

16.5

28

25

25

2

ALD-4011-G0M-R

High-grade XY stage



CHUO PRECISION INDUSTRIAL CO., LTD.

rev.-

\*Mounting screw : Hexagon socket head cap screw M3, 4 screws